


Flat Gaskets



At CTG, our specialty is custom applications. We use the most current technology to eliminate the need for expensive dies. We know that when you have a custom application, you are going to need it fast, so we have the automated machinery, the materials inventory, and the expertise to get it done.

The type of gasket you need but cannot find, is the type of gasket that we make every day at CTG.

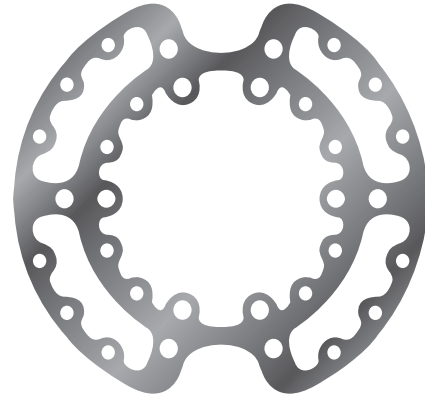

A sample of the types of gaskets that we make

Design Considerations

Gaskets are designed to prevent fluid leakage through the microscopic spaces that exist between two surfaces nominally in contact. When the gasket is compressed between the two surfaces, the gap is sealed.

The material that is best suited for a particular gasket depends on the temperature, pressure, fluid, and chemicals to which the gasket will be exposed during operation. Our experienced engineers will help you select exactly the right material for your situation, and manufacture the gasket to your specifications that same day.



Microscopic view of components in contact without a gasket



Same view with a gasket

Applications

- High temperatures
- High and low pressures
- Surfaces with a relatively large tolerance gap
- Static systems
- Corrosive environments

Benefits

- A simple, inexpensive, and effective way to prevent leakage through two surfaces in contact
- Easy to make in a wide variety of forms and sizes
- Readily fabricated from custom materials to meet the exact needs of the application
- Able to manufacture just a few or several thousand

The optimum material to use for any particular gasket depends on various factors such as the temperature range over which the gasket will be operating and any chemicals or vapors that it will encounter. If you are unsure what material would work best in your application, tell us what conditions your gasket will experience, and we will help you determine the optimum material.

The following list represents just a few of the materials that are often used to construct gaskets. If the material you need to use is not on this list, we make gaskets from a wide range of materials.

- Acetate
- Black rubber, cloth-inserted
- Black rubber sponge (open cell)
- Buna-N (50, 60, and 90 durometer)
- Buna-N (50-65 durometer, white)
- Buna-N, nylon-inserted
- Butyl
- Chipboard
- Cork
- Cork and Buna-N
- Cork and neoprene
- Cork and synthetic rubber, adhesive-backed
- EPDM
- Felt
- Fiber and cork
- Fiberglass cloth
- Flexible graphite (GHR, GHE)
- Gum rubber
- GRI/Durlon 8500
- GRI/Durlon 9000
- Hypalon
- Koroseal
- Leather
- Neoprene, 40 and 60 durometer
- Neoprene, cloth-inserted
- Neoprene sponge (closed cell)
- Neoprene tank gasket
- Nylon
- Plant (vegetable) fiber
- Polyethylene
- Red rubber
- Rubber matting
- Silicone, 50 and 70 durometer
- Silicone sponge
- PTFE
- PTFE, glass filled
- Urethane
- Viton®
- Vulcanized fiber-bone (red)

To discuss your application, give us a call!



ctgsales@ctgasket.com

Address: 12308 Cutten Road | Houston, Texas US | 77066

US Toll Free: 1.800.299.1685

© CTG Inc., 2016. All rights reserved.

Trademarked brand or product names mentioned in this document are the property of their respective owners.

Although reasonable effort has been made to ensure that the information in this document is accurate, it is subject to change at any time without notice. CTG assumes no liability resulting from errors or omissions in this document. Data is provided for general illustrative purposes only; it is not to be used to create specification sheets for particular parts that CTG manufactures. It is the customer's responsibility to confirm that a selected material is appropriate for a particular situation, and to evaluate parts before using them. Furthermore, because elastomeric parts have a finite lifetime, CTG strongly recommends that customers inspect such parts frequently and replace them when necessary.